


RAL Clip

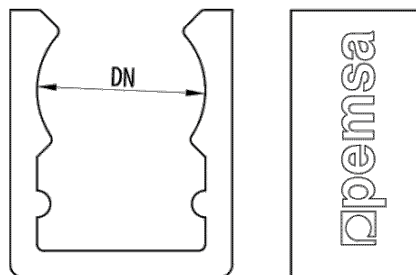

Description

Halogen-free aluminium clip for the fixing of RAL conduits in installations that require an excellent degree of resistance to corrosion and high mechanical performance. Accessory for mounting rigid conduits with fixing by pressure. Available for various conduit sizes.

Advantages

Accessory for the assembly of rigid pipes with fixing of the tube by means of pressure. Lightweight and easy to install.

Available in various sizes: NW16, NW20, NW25, NW32 and NW40.

Working temperature: -45°C to + 250°C.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Made of aluminum, suitable for installations in industrial plants and aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

It is recommended for RAL aluminium conduits in installations that require high mechanical performance. With a high resistance to corrosion in applications of industrial plants, tertiary and industrial sector with high safety requirements. Premises with risk of fire or explosion. Installation outside and in aggressive environments.

Solutions



Main technical characteristics

Aluminium	DN NW16, NW20, NW25, NW32, NW40	Aluminium	-45°/ 250°	Halogen free Flame retardant	ETIM EC002320
-----------	---------------------------------	-----------	------------	------------------------------	------------------

Product data

DN	Ref	kg/u	
NW16	55022016	0.001	50 u
NW20	55022020	0.001	50 u
NW25	55022025	0.001	50 u
NW32	55022032	0.017	50 u
NW40	55022040	0.025	25 u

Coatings

PG/GS - Pre-Galvanised Finish. Resistance to corrosion according to EN-10346. Adequate for indoor installations.

EZ - Electrogalvanized, white, according to EN ISO 2081. Electrolytic zinc protection adequate for indoor installations.

BC - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Improved resistance to corrosion, especially adequate for demanding indoor installations.

GC - Hot-dipped galvanizing in compliance with EN ISO 1461. Appropriate for outdoor installations and aggressive environments.

BLACK C8 - High Resistance coating, Black Colour. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.

304 and 316L stainless steel, in compliance with EN 10088 standard, with passivated Thermicon treatment. Appropriate for outdoor installations and highly aggressive environments.

