
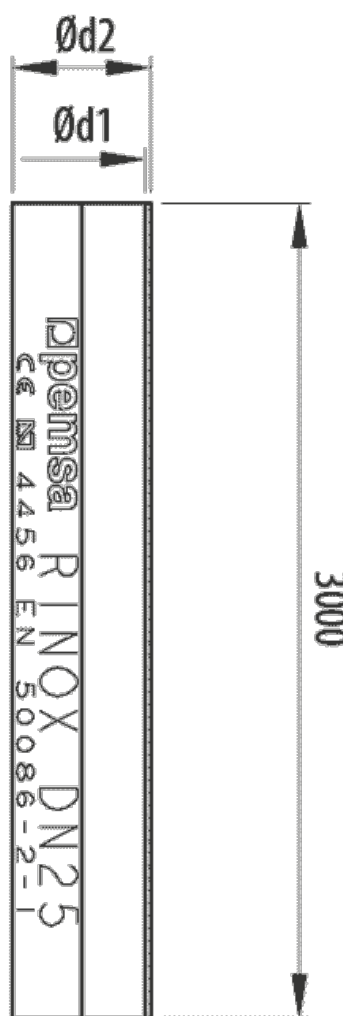


RINOX Rigid Conduit

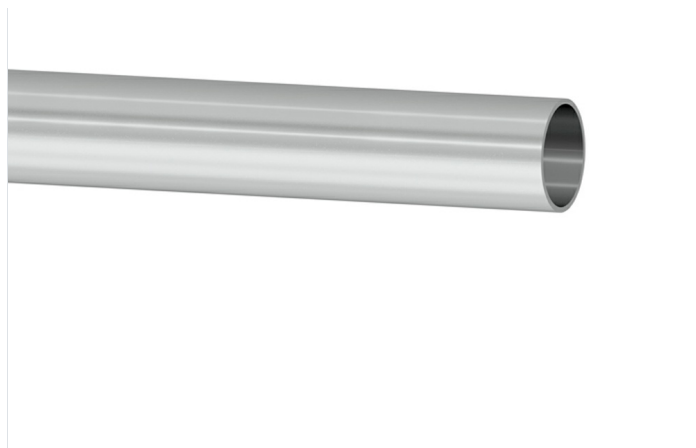

Description

Rigid push fit conduit in AISI 304 stainless steel, recommended in installations that require an excellent degree of resistance to corrosion and high mechanical performance, for the conduction and connection of wiring, especially in food and industrial industries. It is supplied in 3 metre lengths. Available in various diameters.

Advantages

Push fit type connection for joining conduits or accessories.

Suitable for aesthetic applications.

Compression resistance: 1250 N. Impact Resistance: Grade 4.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Manufactured in stainless steel AISI 303, 304, (standard EN 10088), with Thermicron passivation treatment, suitable for installations in aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

Its use is recommended in installations that require an excellent degree of resistance to corrosion and high mechanical performance. For cable management in industrial plants, especially food, beverage and agricultural industries.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RINOX Rigid Conduit



INDUSTRIA ALIMENTARIA INDUSTRIA QUIMICA FARMACEUTICA



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RINOX Rigid Conduit

Main technical characteristics

AISI 304	DN NW16, NW20, NW25, NW32, NW40, NW50	Stainless Steel AISI 304	Ref 4456	1250	6	IP44
-45°/ 250°	Halogen free Flame retardant	ETIM EC001173				

Product data

DN			Ref	kg/u	
NW16	14	16	13021016	0.389	15 m
NW20	18	20	13021020	0.450	15 m
NW25	23	25	13021025	0.600	15 m
NW32	29.6	32	13021032	1.200	15 m
NW40	37.6	40	13021040	1.300	9 m
NW50	47.6	50	13021050	1.714	9 m

Coatings

PG/GS - Pre-Galvanized Finish. Resistance to corrosion according to EN-10346. Adequate for indoor installations.

EZ - Electrogalvanized, white, according to EN ISO 2081. Electrolytic zinc protection adequate for indoor installations.

BC - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Improved resistance to corrosion, especially adequate for demanding indoor installations.

GC - Hot-dipped galvanizing in compliance with EN ISO 1461. Appropriate for outdoor installations and aggressive environments.

BLACK C8 - High Resistance coating, Black Colour. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.

304 and 316L stainless steel, in compliance with EN 10088 standard, with passivated Thermicon treatment. Appropriate for outdoor installations and highly aggressive environments.

