


## DPAN L (910 200)


- Remote visual indication for surge protective devices (SPDs)
- Current-saving LEDs with high luminosity
- Easy installation



Figure without obligation



Basic circuit diagram DPAN L

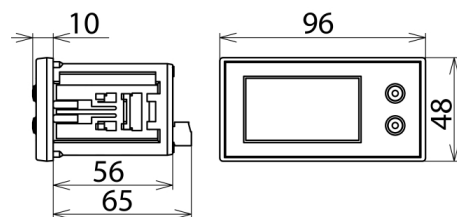

Dimension drawing DPAN L

| Type  | DPAN L                                    |
|---|---|
| Part No.                                      | 910 200                                   |
| Voltage supply                                | 2x 1.5 V AA batteries                     |
| Operating state / fault indication            | green LED (flashing) / red LED (flashing) |
| Flashing frequency                            | 0.1 s on / 1.3 s off                      |
| Enclosure material                            | noryl                                     |
| Degree of protection (front / rear side)      | IP 40 / IP 20                             |
| Operating temperature range (T <sub>U</sub> ) | -25 °C ... +60 °C                         |
| Mounting dimensions                           | 92 x 45 mm                                |
| Dimensions                                    | 96 x 48 x 75 mm                           |
| Weight  | 140 g                                     |
| Customs tariff number                         | 85389091                                  |
| GTIN  | 4013364144019                             |
| PU  | 1 pc(s)                                   |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.