


**RAL Stand off Clamp**

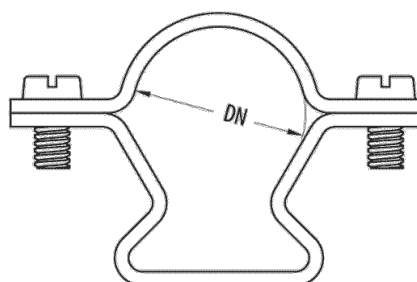

**Description**

Aluminum stand off clamp for fixing rigid metal conduits. Fixing with screws. Available in several diameters.

**Advantages**

It has a foot that allows the conduit to stand off from the floor or wall.

Available in various sizes: NW16, NW20, NW25, NW32 and NW40.

Working temperature: -45°C to + 250°C.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Made of aluminum, suitable for installations in industrial plants and aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

**Applications**

It is recommended for RAL aluminium conduits in installations that require high mechanical performance. With a high resistance to corrosion in applications of industrial plants, tertiary and industrial sector with high safety requirements. Premises with risk of fire or explosion. Installation outside and in aggressive environments.

**Solutions**



**RAL Stand off Clamp**

**Main technical characteristics**

Aluminium	DN NW16, NW20, NW25, NW32, NW40	Aluminium	-45°/ 250°	Halogen free Flame retardant	ETIM EC000464
-----------	---------------------------------	-----------	------------	------------------------------	------------------

**Product data**

DN	Ref	kg/u	
NW16	55031016	0.002	50 u
NW20	55031020	0.002	50 u
NW25	55031025	0.002	50 u
NW32	55031032	0.019	25 u
NW40	55031040	0.020	25 u

**Coatings**

**PG/GS** - Pre-Galvanised Finish. Resistance to corrosion according to EN-10346. Adequate for indoor installations.

**EZ** - Electrogalvanized, white, according to EN ISO 2081. Electrolytic zinc protection adequate for indoor installations.

**BC** - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Improved resistance to corrosion, especially adequate for demanding indoor installations.

**GC** - Hot-dipped galvanizing in compliance with EN ISO 1461. Appropriate for outdoor installations and aggressive environments.

**BLACK C8** - High Resistance coating, Black Colour. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.

**304 and 316L** stainless steel, in compliance with EN 10088 standard, with passivated Thermicon treatment. Appropriate for outdoor installations and highly aggressive environments.

