


Figure without obligation

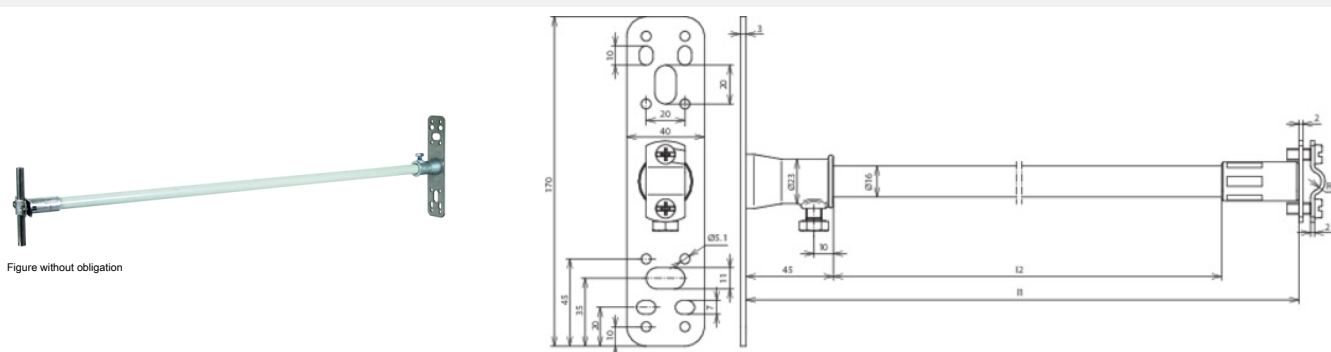

Type Part No.	DIDH 7.10 1030 BP V2A GFK 106 105
Conductor support Rd	7-10 mm
Material of conductor holder	StSt
Length (l1)	1030 mm
Insulating clearance (l2)	945 mm
Fixing	[8x] Ø5.1 / [4x] 7 x 10 / [2x] 11 x 20 mm
Material of plate	StSt
Application note	for insulated fixing of conductors
Diameter Ø of spacer	16 mm mm
Colour of spacer	light grey (RAL 7035) •
Conductor routing	fixed
Rod / conductor holder	two-screw clamp
Material of spacer	GRP
Material factor km	0.7
Permanent temperature range	-50 °C ... +100 °C
Material of fixing bush	ZDC
Type	UV-stabilised and weather-resistant
Max. gust wind speed (holder distance 1000 mm, Al Ø8 mm)	140 km/h
Standard	DIN IEC/TS 62561-8 (VDE V 0185-561-8)
Weight	658 g
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364100206
PU	1 pc(s)

Verisons with other spacer bar lengths are available upon request.