


Figure without obligation

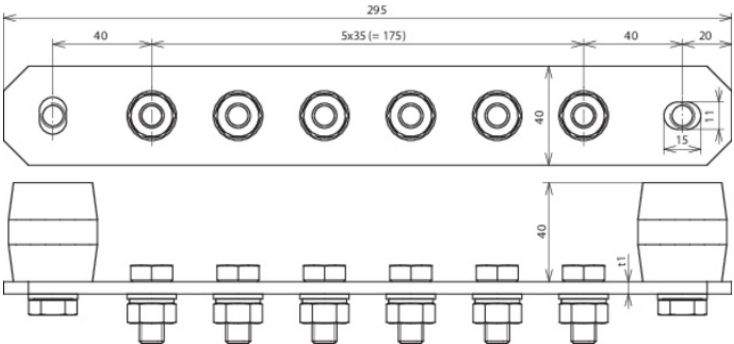

Arrangement: 

Type	PAS I 6AP M10 CU
Part No.	472 207
Number of terminals	6
Material	Cu
Dimensions (l x w x d1)	295 x 40 x 5 mm
Cross-section	200 mm ²
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	39 kA
Screw	 M10 x 25 mm
Material of screw / nut	StSt
Design	with spring washer
Material of insulator	UP
Colour of insulator	red ●
Insulator UV resistance	yes
Lightning current carrying capability (10/350 µs)	 100 kA ^{*)}
Standard	EN 62561-1
Weight	964 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364090927
PU	1 pc(s)

^{*)} For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Special designs available on request.