




PAS I 12AP M10 V2A (472 239)



Figure without obligation

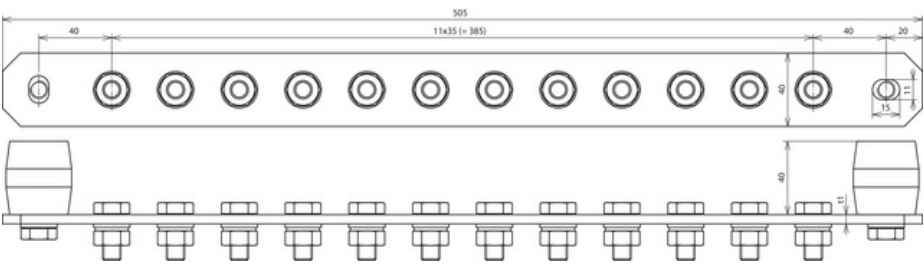

Arrangement: 

Type	PAS I 12AP M10 V2A
Part No.	472 239
Number of terminals	12
Material	StSt
Material No.	1.4301 / 1.4303
Dimensions (l x w x d1)	505 x 40 x 6 mm
Cross-section	240 mm ²
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	8.9 kA
Screw	 M10 x 25 mm
Material of screw / nut	StSt
Design	with spring washer
Material of insulator	UP
Colour of insulator	red ●
Insulator UV resistance	yes
Lightning current carrying capability (10/350 µs)	 100 kA ^{*)}
Standard	EN 62561-1
Weight	1,59 kg
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364096455
PU	1 pc(s)

^{*)} For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Special designs available on request.