



EWD MVK8.10 M10 L100 300 V4A (478 410)

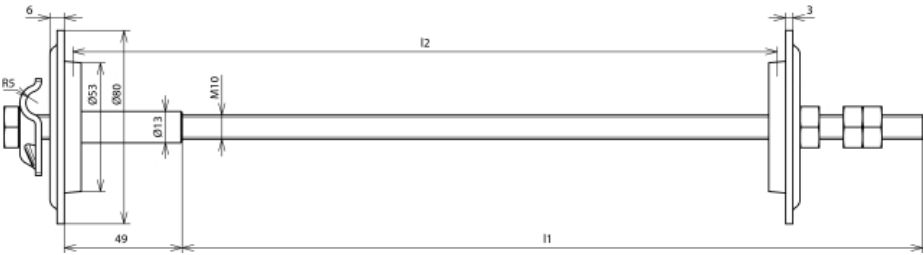


Figure without obligation

With MV clamp made of StSt (V4A) for round conductors 8–10 mm.
Water-pressure-tight wall bushing for leading earthing conductors / equipotential bonding conductors through brickwork or walls; with M10 threaded rod made of StSt.

For subsequent installation through borehole (Ø14 mm) or through spacer in the formwork.
Test for water pressure-tightness up to 1 bar features an installation depth of 10 m in stagnant water.

Arrangement: 

Type	EWD MVK8.10 M10 L100 300 V4A
Part No.	478 410
Length of bushing (l2)	100-300 mm
Length of threaded rod (l1)	308 mm
Sealings	Neoprene
Sealing disc Ø	80 mm
Material of disc	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI:	316Ti / 316L / 316
Material of threaded rod / nut	StSt
Short-circuit current (a.c. 50 Hz / d.c.) (1 s; ≤ 300 °C)	2.7 kA
Standard	EN 62561-1
Weight	580 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364136335
PU	10 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.