



SPK 27.89 BRS AK1X10 2X6.8 GSG V2A (540 199)



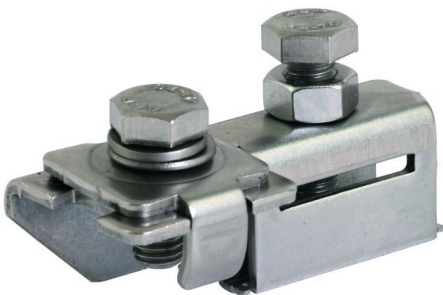


Figure without obligation



For combination with endless tensioning strap (Part No. 540 901), connection cross-section 4-50 mm² (solid / stranded).



| Type                                              | SPK 27.89 BRS AK1X10 2X6.8 GSG V2A |
|---------------------------------------------------|------------------------------------|
| Part No.                                          | 540 199                            |
| Material                                          | StSt                               |
| Screw                                             | ⚙ M8 x 20 mm                       |
| Material of screw                                 | StSt                               |
| Connection Rd                                     | 1 x 10 mm / 1-2 x 6-8 mm           |
| Connection (solid / stranded)                     | 4-50 mm²                           |
| Lightning current carrying capability (10/350 µs) | 100 kA <sup>*)</sup>               |
| Standard                                          | EN 62561-1                         |
| Weight                                            | 107 g                              |
| Customs tariff number (Comb. Nomenclature EU)     | 85359000                           |
| GTIN                                              | 4013364304741                      |
| PU                                                | 25 pc(s)                           |

<sup>\*)</sup> For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.