


TE 25 1000 Z STTZN (625 101)

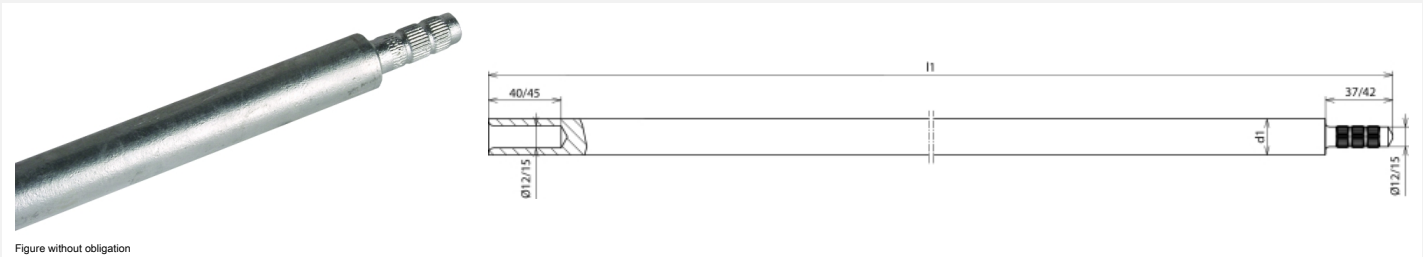

| Type                                                  | TE 25 1000 Z STTZN |
|-------------------------------------------------------|--------------------|
| Part No.                                              | 625 101            |
| Material                                              | St/tZn             |
| Rod length (l1)                                       | 1000 mm            |
| Diameter Ø (d1)                                       | 25 mm              |
| Pin diameter                                          | 15 mm              |
| Hot-dip galvanisation - single value:                 | ~70 µm             |
| Hot-dip galvanisation - average value:                | ≥ 55 µm            |
| Tensile strength                                      | 410 N/mm²          |
| Static tensile strength (vertical tension)            | approx. 32000 N    |
| Specific conductivity                                 | ≥ 6.66 m/Ohm mm²   |
| Specific resistance                                   | ≤ 0.15 Ohm mm² / m |
| Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C) | 12.3 kA            |
| Standard                                              | EN 62561-2         |
| Weight                                                | 3,72 kg            |
| Customs tariff number (Comb. Nomenclature EU)         | 85389099           |
| GTIN                                                  | 4013364021877      |
| PU                                                    | 6 pc(s)            |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.