


FM D40 L2200 GFK AL V2A DBS R320 STTZN (819 685)

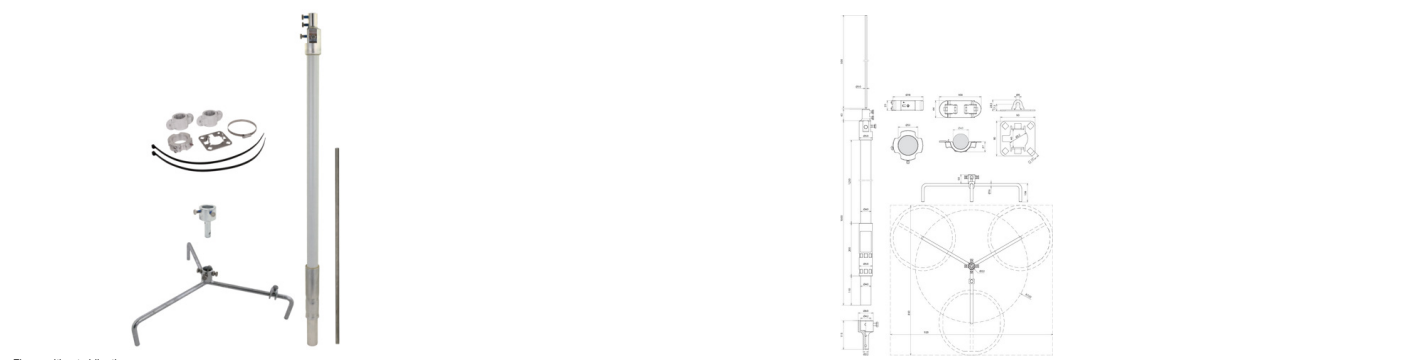

Type	FM D40 L2200 GFK AL V2A DBS R320 STTZN
Part No.	819 685
Height	2200 mm
Material of tripod	St/tZn
Space required for tripod	850 x 920 mm
Radius of tripod	320 mm
Number of bases	3
Material of supporting tube	GRP / Al
Length of supporting tube	1600 mm
Insulating clearance	1230 mm
Diameter Ø outside	40 mm
Length of air-termination tip	500 mm
Material of air-termination tip	StSt
Pull-out force with a length of 500#mm	200 N (supporting tube insulator as per 62561-8)
Bending force with a length of 500#mm	200 N (supporting tube insulator as per 62561-8)
Max. gust wind speed	See wind load pamphlet
Standard	DIN IEC/TS 62561-8 (VDE V 0185-561-8)
Weight	6,12 kg
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364494459
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Specifications regarding max. gust wind speeds of the air-termination systems can be found in the wind load matrix.