


FM D40 L2700 GFK AL V2A DBS R320 STTZN (819 690)

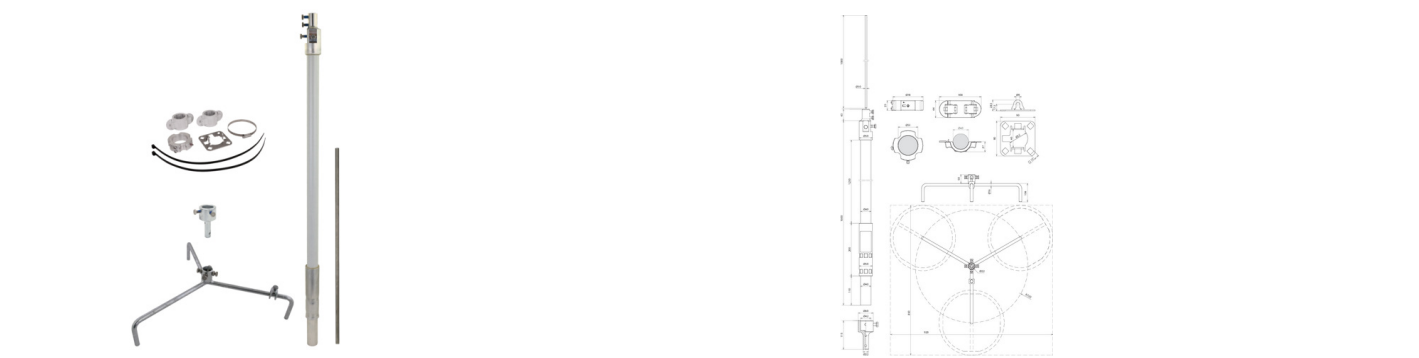

Type	FM D40 L2700 GFK AL V2A DBS R320 STTZN	
Part No.	819 690	
Height	2700 mm	
Material of tripod	HDG steel (St/tZn)	
Space required for tripod	850 x 920 mm	
Radius of tripod	320 mm	
Number of bases	3	
Material of supporting tube	GRP / Al	
Length of supporting tube	1600 mm	
Insulating clearance	1230 mm	
Diameter Ø outside	40 mm	
Length of air-termination tip	1000 mm	
Material of air-termination tip	StSt	
Pull-out force with a length of 500#mm	200 N (supporting tube insulator as per 62561-8)	
Bending force with a length of 500#mm	200 N (supporting tube insulator as per 62561-8)	
Max. gust wind speed	See wind load pamphlet	
Standard	DIN IEC/TS 62561-8 (VDE V 0185-561-8)	
Weight	6,4 kg	
Customs tariff number (Comb. Nomenclature EU)	85389099	
GTIN	4013364494466	
PU	1 pc(s)	

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Specifications regarding max. gust wind speeds of the air-termination systems can be found in the wind load matrix.