


100

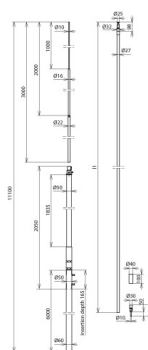

Type Part No.	FM 60 L11M IP HVIP L10M GFK AL STTZn 819 760
Total length of air-termination mast	11000 mm
Length of air-termination rod	3000 mm
Material of air-termination rod	Al
Length of supporting tube	2300 mm
Material of supporting tube	GRP / Al
Length of mast pipe	6000 mm
Material of mast pipe	St/tZn
Diameter Ø conductor	27 mm
Lightning current carrying capability (class / I _{imp})	H2 / 200 kA
Colour of conductor	black ●
Material of conductor	Cu
Minimum order length	10 m
Maximum order length	35 m
Suitable for installation outside tube	no
Max. gust wind speed	(Max. free length 8,500 mm, 1x HVI power inside) 138 km/h
Standard	DIN IEC/TS 62561-8 (VDE V 0185-561-8)
Weight	56,64 kg
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364240391
PU	1 pc(s)

: bridging component : equipotential bonding bar