


DV MOD TT 255 (956 031)

- High discharge capacity due to heavy-duty RAC spark gap
- Easy replacement of protection modules without tools due to module locking system with module release button

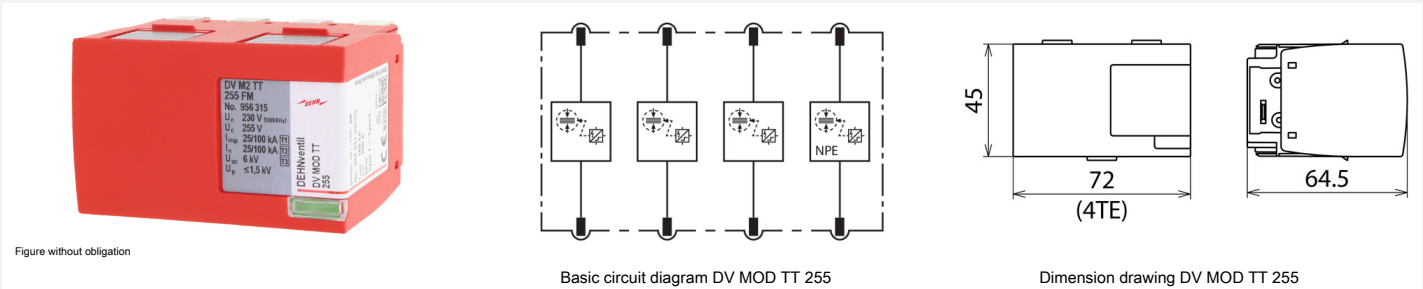

RAC spark-gap-based protection module

Type	DV MOD TT 255
Part No.	956 031
Max. continuous operating voltage (a.c.) (U_c)	255 V
Lightning impulse current (10/350 μ s) (I_{imp})	100 kA
Specific energy (W/R)	156.25 kJ/ohms
Follow current extinguishing capability [L-N] (a.c.) (I_{fi})	50 kA _{rms}
Follow current limitation / Selectivity	No tripping of a 32 A gG fuse up to 50 kA _{rms} (prosp.)
Short-circuit current rating [L-N]/[N-PE] (I_{SCCR})	50 kA _{rms} / 100 A _{rms}
Weight	307 g
Customs tariff number (Comb. Nomenclature EU)	85363090
GTIN	4013364410275
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.