

Panel mounted receptacle

Part number: 23177



MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.MENNEKES.org

Product Description

- nickel plated contacts, highly heat resistant contact carrier
- frame terminals
- X-CONTACT
- straight insertion direction
- (form AS)

Technical Details

Panel mounted receptacle	23177
Ampere	63A
Number of poles	5p
Clock position	2h
Nominal voltage AC	50 - 500V
Nominal frequency	300 - 500 Hz
Protection type IP	IP67
Contact carrier	nickel plated contacts, highly heat resistant contact carrier
X-CONTACT	yes
Connection	frame terminals
Contact screw drive	PZ2, slot
Pilot contact	without pilot contact
Pilot contact switch	no
Flange dimensions	107 x 100 mm
Hole spacings	85 x 77 mm
Insertion direction	straight
Highly resistant to chemicals	no
Military version	yes
Tightening torque connection terminal	2 Nm
Conductor cross-section min.	6 mm ²
Conductor cross-section max.	25 mm ²
Weight (net)	745 g
Packaging unit	5 pcs
Quantity per pallet	330 pcs

Panel mounted receptacle	23177
EAN / identification number	4015394043577

Permissible ambient conditions		
	Min.	Max.
Permissible ambient temperature	-35 °C	60 °C


Material properties	
Housing	PC bronze green [similar RAL 6031]
Hinged lid	PC bronze green [similar RAL 6031] PA6 bronze green [similar RAL 6031]

Material resistance
The material resistance overview can be found on the website in the section “Knowledge” - “Product knowledge” - “Materials”.

Material and environmental properties	
RoHS 2011/65/EU incl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	no

Regulations and Standards	
Norm	DIN EN IEC 60309-2
Declaration of Conformity	CE
Test label	EAC

Dimensional Drawing

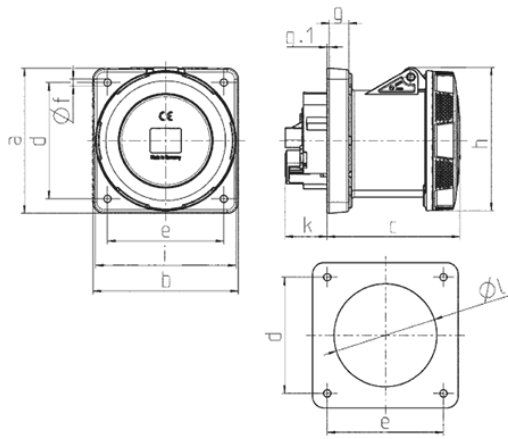

Drawing 1 MB 258	Amp. Poles	125		
		3	4	5
Dim. in mm	a	130	130	130
	b	130	130	130
	c	119	119	119
	d	104	104	104
	e	104	104	104
	f	6.5	6.5	6.5
	g	18	18	18
	g.1	2	2	2
	h	129	129	129
	i	126	126	126
	k	43	43	43
	l	98	98	98
	Terminal for cond. cross section (mm ²) min.-max.	25 -70	25 -70	25 -70