

# Wall mounted receptacle Cepex

Part number: 4803



**MENNEKES**  
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1  
57399 Kirchhundem  
GERMANY

[www.MENNEKES.org](http://www.MENNEKES.org)

# Product Description

- screw connection technology
- internal fixing
- enclosure can be turned 180°

# Technical Details

| Wall mounted receptacle Cepex         | 4803                  |
|---------------------------------------|-----------------------|
| Product serie                         | Cepex                 |
| Ampere                                | 16A                   |
| Number of poles                       | 4p                    |
| Clock position                        | 6h                    |
| Nominal voltage AC                    | 400V                  |
| Nominal frequency                     | 50 - 60 Hz            |
| Protection type IP                    | IP54                  |
| Contact carrier                       | standard              |
| X-CONTACT                             | no                    |
| Connection                            | screw terminals       |
| Contact screw drive                   | PZ2, slot             |
| Pilot contact                         | without pilot contact |
| Pilot contact switch                  | no                    |
| Blind cable entry at the rear         | no                    |
| Enclosure base can be turned 180°     | yes                   |
| Insertion direction                   | straight              |
| Type of mounting                      | internal fixing       |
| Highly resistant to chemicals         | no                    |
| Military version                      | no                    |
| Lockable                              | no                    |
| Labeling field                        | no                    |
| Tightening torque connection terminal | 1.2 Nm                |
| Strip length solid conductor          | 8 - 10 mm             |
| Conductor cross-section min.          | 1.5 mm <sup>2</sup>   |
| Conductor cross-section max.          | 4 mm <sup>2</sup>     |
| Weight (net)                          | 308 g                 |

|                               |               |
|-------------------------------|---------------|
| Wall mounted receptacle Cepex | 4803          |
| Packaging unit                | 8 pcs         |
| Quantity per pallet           | 720 pcs       |
| EAN / identification number   | 4015394315155 |

#### Permissible ambient conditions

|                                   | Min.   | Max.  |
|-----------------------------------|--------|-------|
| Permissible ambient temperature   | -25 °C | 40 °C |
| Average temperature over 24 hours |        | 35 °C |

#### Material properties

|            |                                      |
|------------|--------------------------------------|
| Base       | PC/ASA light grey [similar RAL 7035] |
| Upper part | PC/ASA light grey [similar RAL 7035] |
| Hinged lid | PC/ASA light grey [similar RAL 7035] |

#### Material resistance

The material resistance overview can be found on the website in the section "Knowledge" - "Product knowledge" - "Materials".


#### Material and environmental properties

|                                   |     |
|-----------------------------------|-----|
| RoHS 2011/65/EU incl. 2015/863/EU | ✓   |
| POP regulation (EU) 2019/1021     | ✓   |
| Halogen-free                      | yes |

#### Regulations and Standards

|                           |                    |
|---------------------------|--------------------|
| Norm                      | DIN EN IEC 60309-2 |
| Declaration of Conformity | CE                 |

# Dimensional Drawing

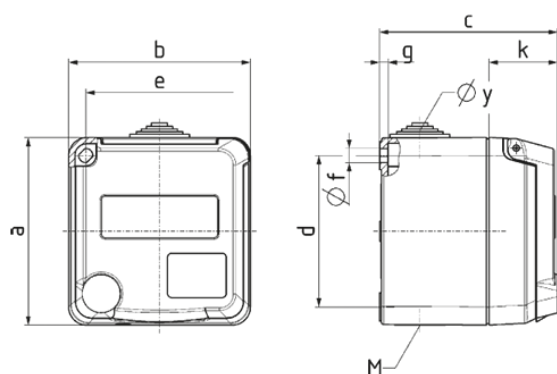

| Drawing<br>1 MB 746                                              | Amp.<br>Poles | 16     | 16     |        |        | 32     |        |        |
|------------------------------------------------------------------|---------------|--------|--------|--------|--------|--------|--------|--------|
|                                                                  |               | 2p+E   | 3      | 4      | 5      | 3      | 4      | 5      |
| Dim. in mm                                                       | a             | 93     | 93     | 93     | 93     | 93     | 93     | 93     |
|                                                                  | b             | 90     | 90     | 90     | 90     | 90     | 90     | 90     |
|                                                                  | c             | 89     | 89     | 89     | 89     | 101    | 101    | 101    |
|                                                                  | d             | 75     | 75     | 75     | 75     | 75     | 75     | 75     |
|                                                                  | e             | 73     | 73     | 73     | 73     | 73     | 73     | 73     |
|                                                                  | f             | 5.5    | 5.5    | 5.5    | 5.5    | 5.5    | 5.5    | 5.5    |
|                                                                  | g             | 4.2    | 4.2    | 4.2    | 4.2    | 4.2    | 4.2    | 4.2    |
|                                                                  | k             | 34     | 34     | 34     | 34     | 34     | 34     | 34     |
|                                                                  | y             | 25.5   | 25.5   | 25.5   | 25.5   | 25.5   | 25.5   | 25.5   |
|                                                                  | M             | 25x1.5 | 25x1.5 | 25x1.5 | 25x1.5 | 25x1.5 | 25x1.5 | 25x1.5 |
| Terminal for cond. cross<br>section (mm <sup>2</sup> ) min.-max. |               | 1.5    | 1.5    | 1.5    | 1.5    | 2.5    | 2.5    | 2.5    |
|                                                                  |               | 2.5    | —4     | —4     | —4     | —6     | —6     | —6     |