


UEBDD V E, vierkante blinddoos

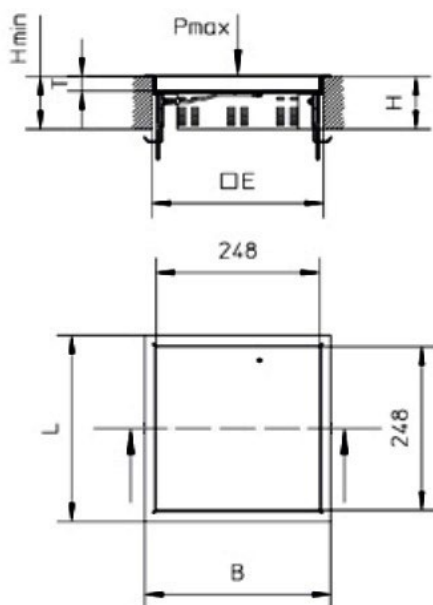

Aan te wenden bij droog te reinigen vloerbekledingen

Dichtheidsgraad:
niet in gebruik IP30

De trekdoos is getest conform de norm NBN EN 50085.

E roestvast staal V2A

Referentie	H [mm]	Hmin [mm]	B [mm]	L [mm]	E [mm]	T [mm]	Pmax [kN]	G [kg]
UEBDD 15-V E	72	90	283	283	261 x 261	12	2	2,10
UEBDD 25-V E	82	100	283	283	261 x 261	22	2	2,30

De levering is inclusief 2 klauwen UDBS 40-80

De levering is inclusief 1 dichting UGD-V 2

3/05/2018